


Beam Packing Anvil Case




1

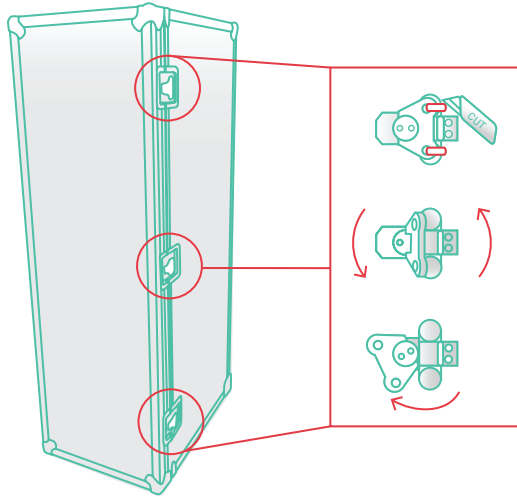

Twist keys must lay flat.

2

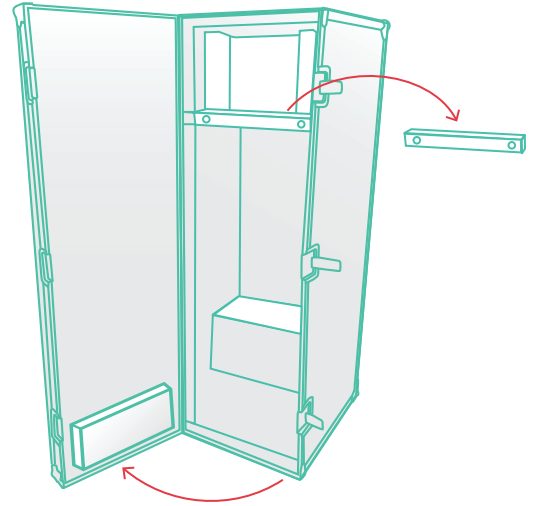


Open door and remove head safety bar.

3




Strap dock into place.

4

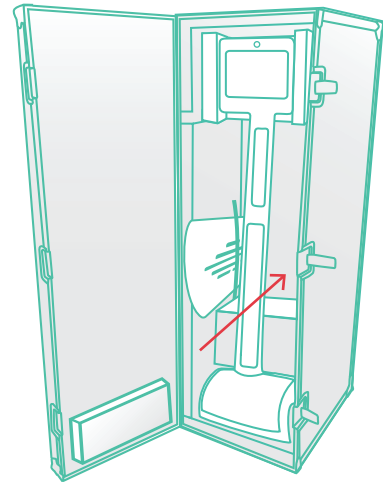


Insert Beam.

5

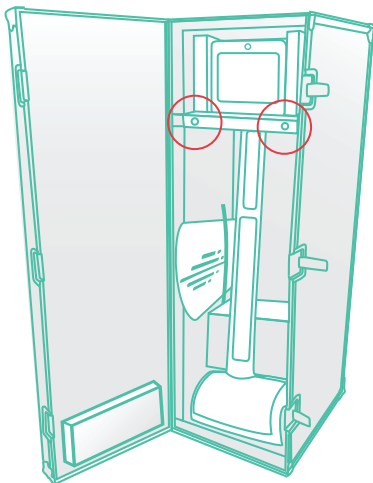

Screw head safety bar into place.

6

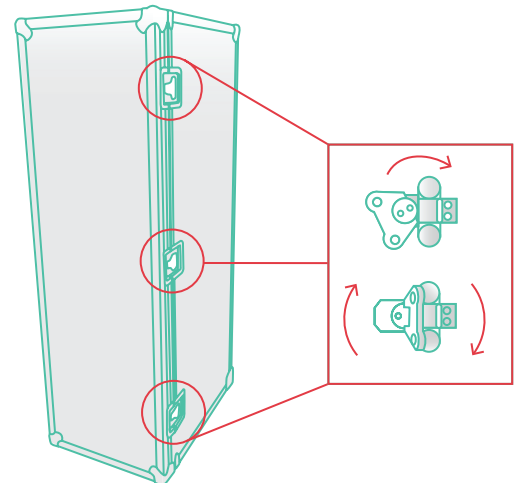

Close door and latch.